

## Performance Curve for Metering Pump


DATE	
CUSTOMER	
ITEM NO.	
PUMP MODEL	JSRV25

### PUMP SPECIFICATIONS

MAX. CAPACITY		MAX. DIS. PRESSURE	STROKE RATE	CONNECTION	
60 Hz	25 cc/min.	10 kgf/cm <sup>2</sup>	57 spm	Suction	KS 10K 15A FF
50 Hz	20 cc/min.		47 spm	Discharge	KS 10K 15A FF

### MOTOR SPECIFICATIONS

PHASE	FREQ.	VOLTAGE	POLES	OUTPUT	RATED CURRENT	INS. CLASS	PROT'N GRADE
3	60Hz	220/380V	4	0.37kW	1.94/1.12A	F	IP55
	50Hz	230/400V			1.79/1.03A		
MAKER		SIEMENS		TEST CONDITION		FOR WATER 20°C & 1.0S.G.	

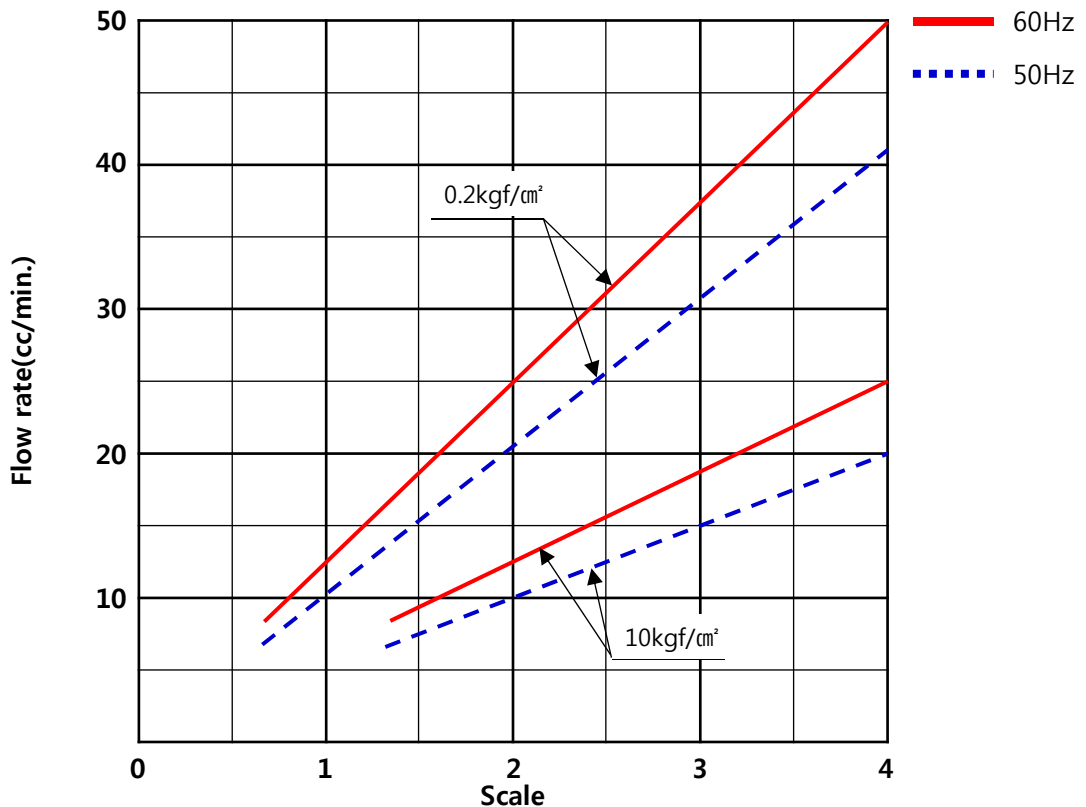

PREPARED BY	CHECKED BY	APPROVED BY	REV. No.	REVISED BY	CHECKED BY	APPROVED BY
H. J. SEO	W. PARK	S. C. KIM				



**E-WHA CHEMICAL FEEDER CO., LTD.**

(주) 이화정량펌프

26-6, Seoneup-ri, Janghowon-eup, Icheon-city, Gyeonggi-do, Korea 467-904

Tel. +82-31-642-8000

Fax. +82-31-642-4071

E-mail : ewhapump@ewhapump.com

URL <http://www.ewhapump.com>