

## Performance Curve for Metering Pump


DATE	
CUSTOMER	
ITEM NO.	
PUMP MODEL	GVMD16L

### PUMP SPECIFICATIONS

MAX. CAPACITY		MAX. DIS. PRESSURE	STROKE RATE	CONNECTION	
60 Hz	16,000 cc/min.	5 kgf/cm <sup>2</sup>	5~111 spm	Suction	KS 10K 20A FF
50 Hz	13,200 cc/min.		4~92 spm	Discharge	KS 10K 20A FF

### MOTOR SPECIFICATIONS

PHASE	FREQ.	VOLTAGE	POLES	OUTPUT	TYPE	INS. CLASS	PROT'N GRADE
3	60Hz	220~380V	4	0.4kW	BLDC	B	IP54
	50Hz						
MAKER		HS ind.		TEST CONDITION		FOR WATER 20°C & 1.0S.G.	

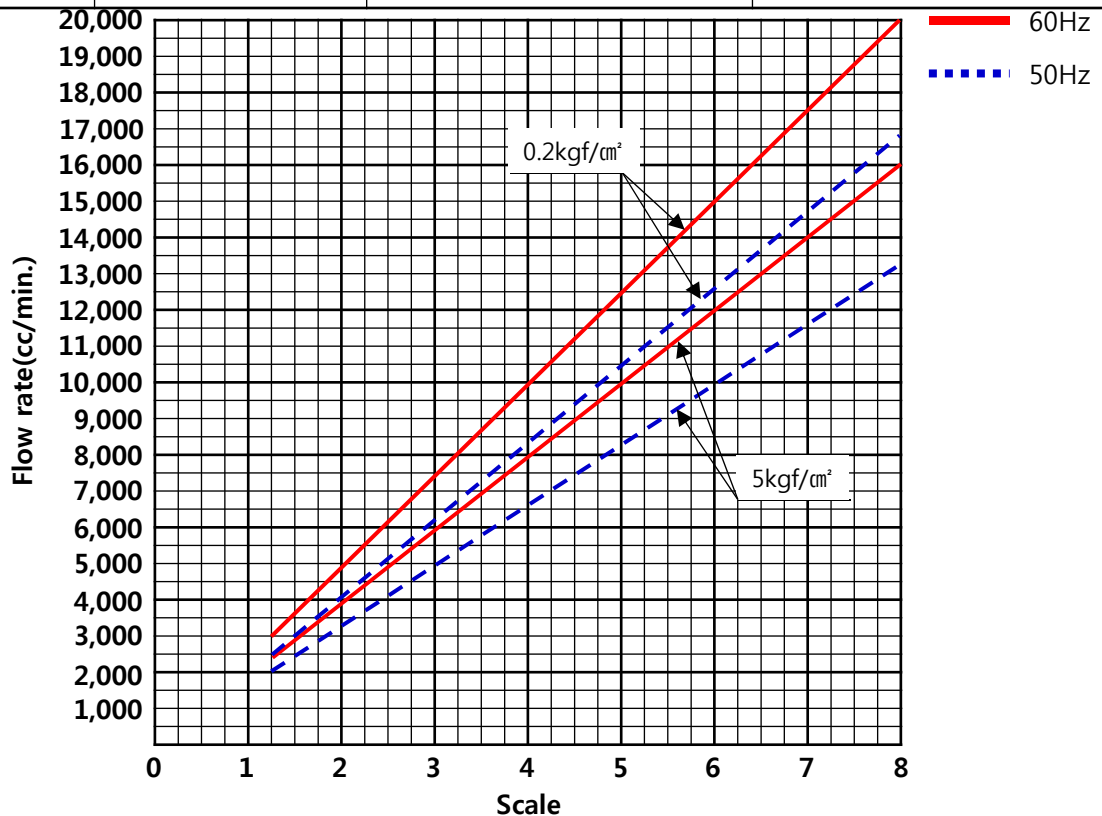

PREPARED BY	CHECKED BY	APPROVED BY	REV. No.	REVISED BY	CHECKED BY	APPROVED BY
H. J. SEO	W. PARK	S. C. KIM				



**E-WHA CHEMICAL FEEDER CO., LTD.**  
 (주) 이화정량펌프

26-6, Seoneup-ri, Janghowon-eup, Icheon-city, Gyeonggi-do, Korea 467-904  
 Tel. +82-31-642-8000 Fax. +82-31-642-4071  
 E-mail : ewhapump@ewhapump.com URL http://www.ewhapump.com