


## Performance Curve for Metering Pump

DATE	
CUSTOMER	
ITEM NO.	
PUMP MODEL	JMP700

PUMP SPECIFICATIONS					
MAX. CAPACITY		MAX. DIS. PRESSURE	STROKE RATE	CONNECTION	
60 Hz	700 cc/min.	70 kgf/cm <sup>2</sup>	111 spm	Suction	KS 10K 15A FF
50 Hz	580 cc/min.		92 spm	Discharge	KS 63K 15A RF

MOTOR SPECIFICATIONS							
PHASE	FREQ.	VOLTAGE	POLES	OUTPUT	RATED CURRENT	INS. CLASS	PROT'N GRADE
3	60Hz	220/380V	4	0.4kW	1.94/1.12A	F	IP55
MAKER		SIEMENS		TEST CONDITION		FOR WATER 20°C & 1.0S.G.	

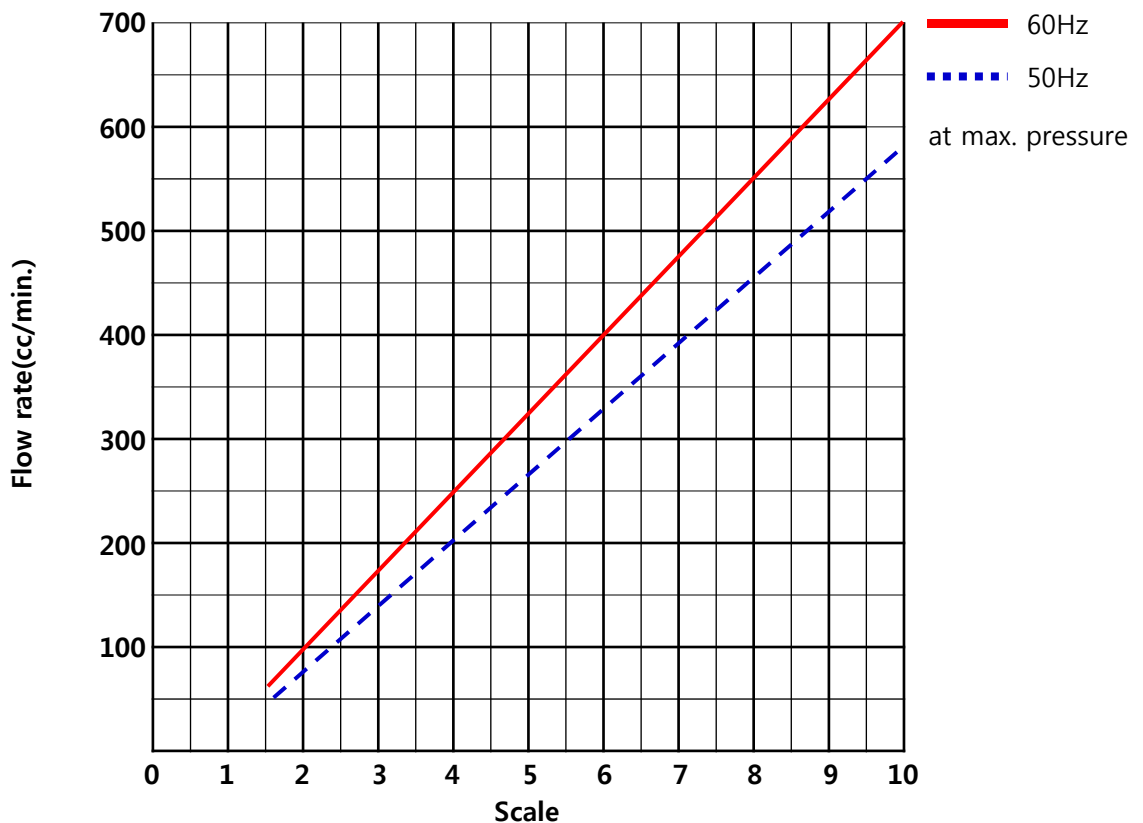

PREPARED BY	CHECKED BY	APPROVED BY	REV. No.	REVISED BY	CHECKED BY	APPROVED BY
<i>H. J. SEO</i>	<i>W. PARK</i>	<i>S. C. KIM</i>				



**E-WHA CHEMICAL FEEDER CO., LTD.**  
 (주) 이화정량펌프


26-6, Seoneup-ri, Janghowon-eup, Icheon-city, Gyeonggi-do, Korea 467-904  
 Tel. +82-31-642-8000 Fax. +82-31-642-4071  
 E-mail : ewhapump@ewhapump.com URL <http://www.ewhapump.com>

## Performance Curve for Metering Pump

DATE	
CUSTOMER	
ITEM NO.	
PUMP MODEL	JMP700

PUMP SPECIFICATIONS					
MAX. CAPACITY		MAX. DIS. PRESSURE	STROKE RATE	CONNECTION	
60 Hz	700 cc/min.	100 kgf/cm <sup>2</sup>	111 spm	Suction	KS 10K 15A FF
50 Hz	580 cc/min.		92 spm	Discharge	KS 63K 15A RF

MOTOR SPECIFICATIONS							
PHASE	FREQ.	VOLTAGE	POLES	OUTPUT	RATED CURRENT	INS. CLASS	PROT'N GRADE
3	60Hz	220/380V	4	0.75kW	3.3/1.9A	F	IP55
MAKER		SIEMENS		TEST CONDITION		FOR WATER 20°C & 1.0S.G.	

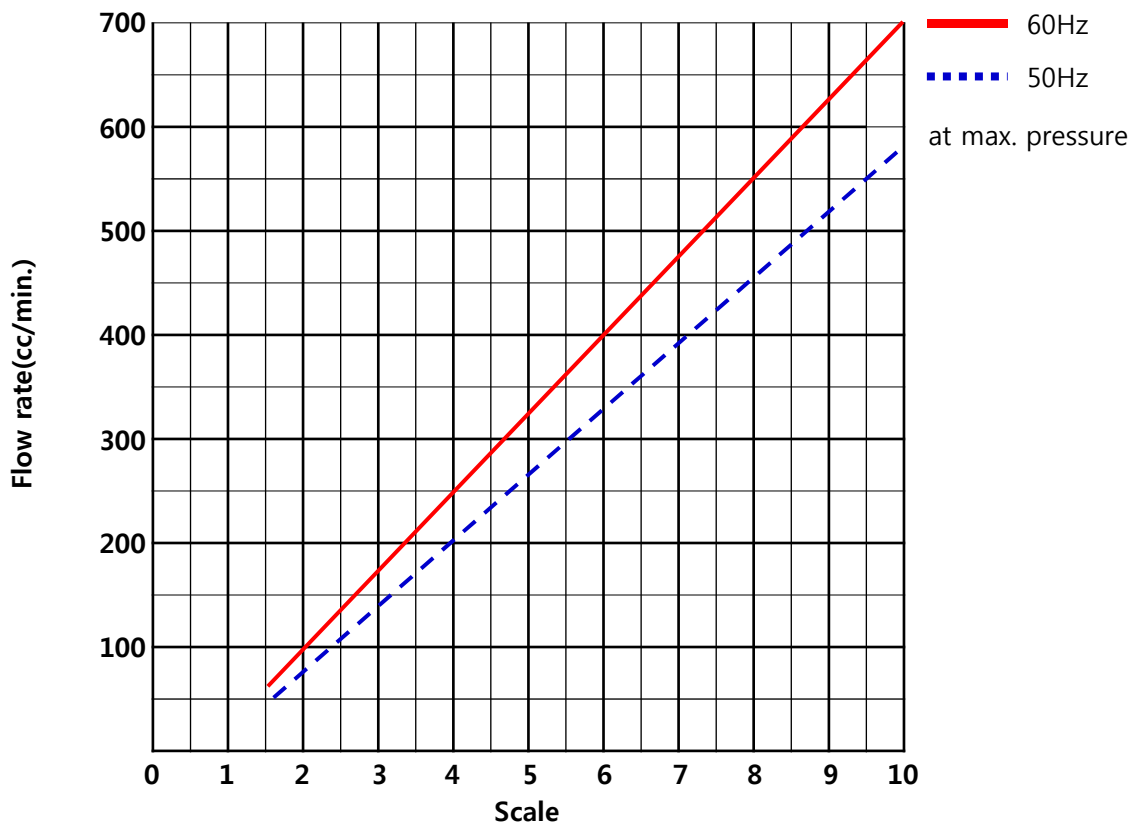

PREPARED BY	CHECKED BY	APPROVED BY	REV. No.	REVISED BY	CHECKED BY	APPROVED BY
<i>H. J. SEO</i>	<i>W. PARK</i>	<i>S. C. KIM</i>				



**E-WHA CHEMICAL FEEDER CO., LTD.**  
 (주) 이화정량펌프


26-6, Seoneup-ri, Janghowon-eup, Icheon-city, Gyeonggi-do, Korea 467-904  
 Tel. +82-31-642-8000 Fax. +82-31-642-4071  
 E-mail : ewhapump@ewhapump.com URL <http://www.ewhapump.com>

## Performance Curve for Metering Pump

DATE	
CUSTOMER	
ITEM NO.	
PUMP MODEL	JMP700

PUMP SPECIFICATIONS					
MAX. CAPACITY		MAX. DIS. PRESSURE	STROKE RATE	CONNECTION	
60 Hz	700 cc/min.	150 kgf/cm <sup>2</sup>	111 spm	Suction	KS 10K 15A FF
50 Hz	580 cc/min.		92 spm	Discharge	KS 63K 15A RF

MOTOR SPECIFICATIONS							
PHASE	FREQ.	VOLTAGE	POLES	OUTPUT	RATED CURRENT	INS. CLASS	PROT'N GRADE
3	60Hz	220/380V	4	1.5kW	6.0/3.45A	F	IP55
MAKER		SIEMENS		TEST CONDITION		FOR WATER 20°C & 1.0S.G.	

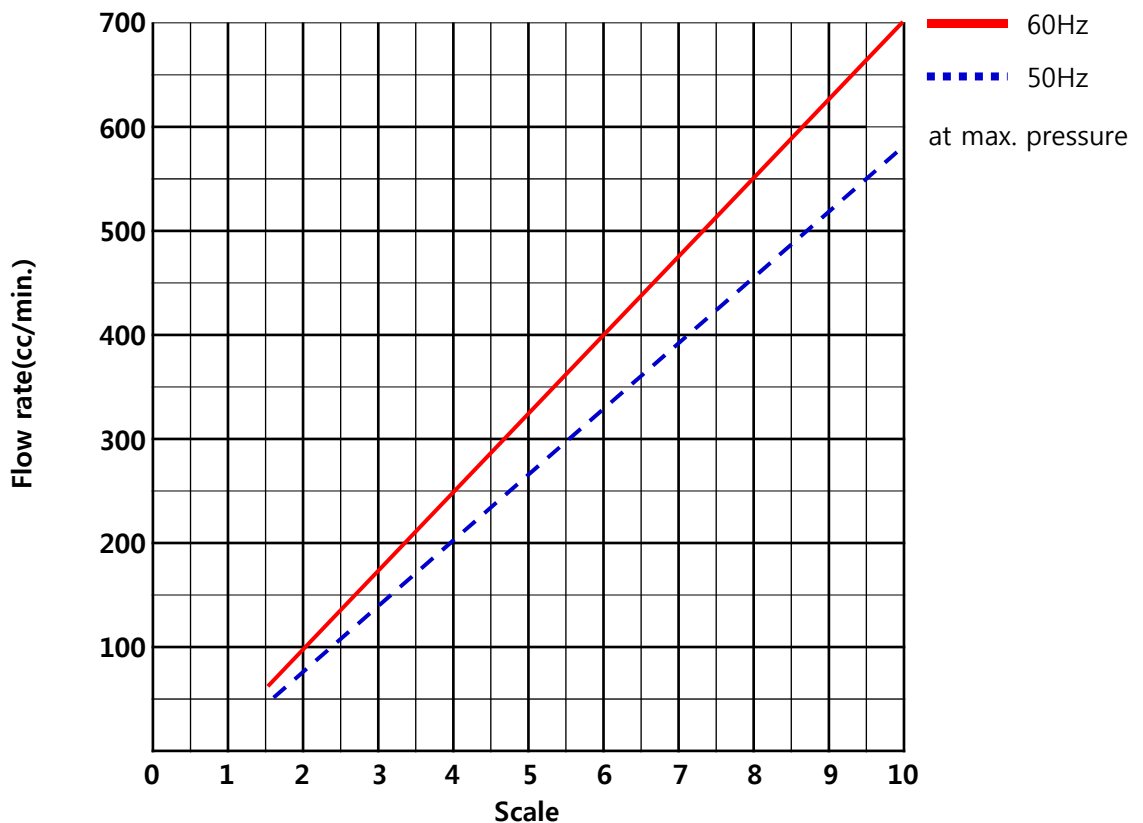

PREPARED BY	CHECKED BY	APPROVED BY	REV. No.	REVISED BY	CHECKED BY	APPROVED BY
H. J. SEO	W. PARK	S. C. KIM				



**E-WHA CHEMICAL FEEDER CO., LTD.**  
 (주) 이화정량펌프

26-6, Seoneup-ri, Janghowon-eup, Icheon-city, Gyeonggi-do, Korea 467-904  
 Tel. +82-31-642-8000 Fax. +82-31-642-4071  
 E-mail : ewhapump@ewhapump.com URL <http://www.ewhapump.com>